


Destinataire: ...

Distributeur: ...

Notes: ...

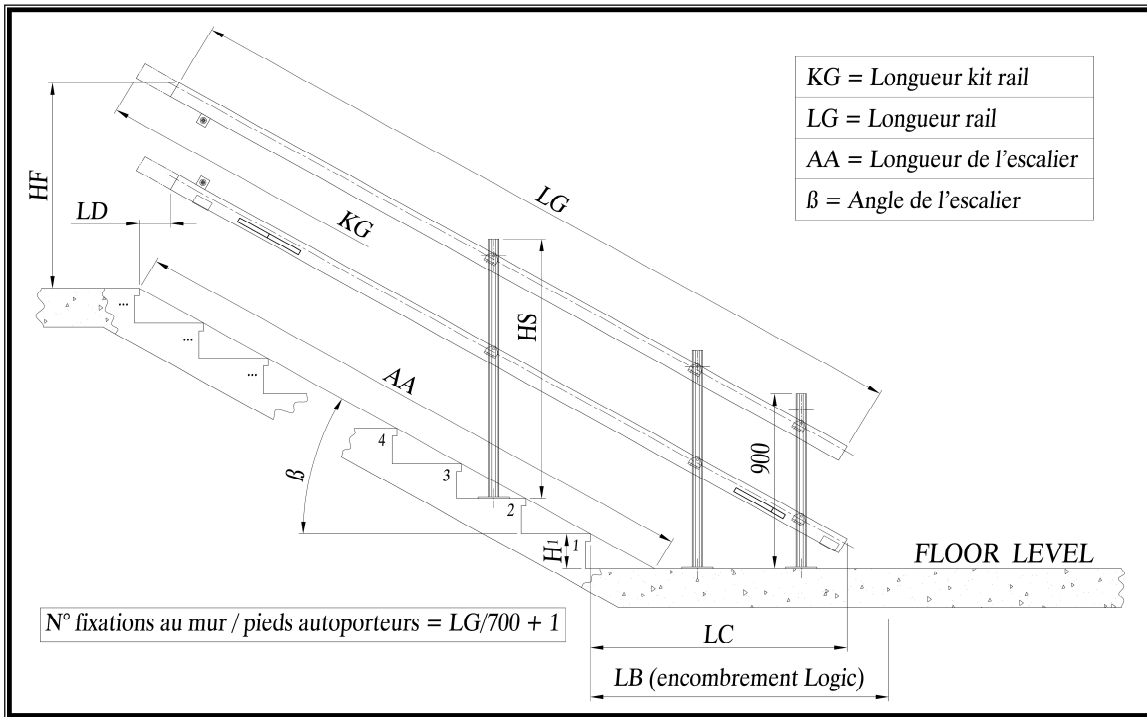

Dimension plateforme

850 × 700

| β | LG DX | LG SX | HS | LB* | LC* DX | LC* SX | LD DX | LD SX | HF DX | HF SX |
|-----|----------|----------|------|------|-----------|-----------|----------|----------|----------|----------|
| 10° | AA + 815 | AA + 815 | 1250 | 2130 | 1890 | 1930 | 55 | 90 | 900 | 895 |
| 11° | AA + 810 | AA + 810 | 1250 | 2035 | 1795 | 1830 | 55 | 90 | 910 | 900 |
| 12° | AA + 805 | AA + 805 | 1250 | 1950 | 1710 | 1745 | 55 | 90 | 915 | 905 |
| 13° | AA + 805 | AA + 805 | 1250 | 1880 | 1640 | 1675 | 55 | 95 | 920 | 915 |
| 14° | AA + 800 | AA + 800 | 1250 | 1825 | 1580 | 1615 | 60 | 95 | 930 | 920 |
| 15° | AA + 800 | AA + 800 | 1250 | 1770 | 1525 | 1560 | 60 | 95 | 935 | 925 |
| 16° | AA + 800 | AA + 800 | 1250 | 1725 | 1480 | 1515 | 60 | 95 | 940 | 930 |
| 17° | AA + 800 | AA + 795 | 1250 | 1685 | 1435 | 1470 | 60 | 95 | 945 | 935 |
| 18° | AA + 800 | AA + 795 | 1250 | 1650 | 1400 | 1435 | 60 | 100 | 955 | 940 |
| 19° | AA + 800 | AA + 795 | 1250 | 1620 | 1365 | 1400 | 60 | 100 | 960 | 945 |
| 20° | AA + 800 | AA + 795 | 1250 | 1590 | 1335 | 1370 | 60 | 100 | 965 | 955 |
| 21° | AA + 805 | AA + 795 | 1250 | 1570 | 1310 | 1345 | 65 | 105 | 975 | 960 |
| 22° | AA + 810 | AA + 800 | 1250 | 1550 | 1290 | 1325 | 65 | 105 | 985 | 970 |
| 23° | AA + 815 | AA + 805 | 1250 | 1530 | 1270 | 1305 | 65 | 110 | 995 | 975 |
| 24° | AA + 820 | AA + 810 | 1250 | 1515 | 1255 | 1285 | 65 | 110 | 1000 | 980 |
| 25° | AA + 825 | AA + 810 | 1250 | 1500 | 1235 | 1270 | 65 | 115 | 1010 | 990 |
| 26° | AA + 830 | AA + 815 | 1250 | 1485 | 1220 | 1255 | 70 | 115 | 1020 | 995 |
| 27° | AA + 835 | AA + 815 | 1250 | 1475 | 1205 | 1235 | 70 | 120 | 1030 | 1005 |
| 28° | AA + 840 | AA + 820 | 1450 | 1460 | 1190 | 1220 | 70 | 120 | 1040 | 1010 |
| 29° | AA + 845 | AA + 820 | 1450 | 1450 | 1175 | 1205 | 75 | 125 | 1045 | 1020 |
| 30° | AA + 845 | AA + 825 | 1450 | 1440 | 1160 | 1195 | 75 | 125 | 1055 | 1025 |
| 31° | AA + 850 | AA + 825 | 1450 | 1430 | 1150 | 1180 | 75 | 130 | 1065 | 1030 |
| 32° | AA + 855 | AA + 825 | 1450 | 1420 | 1135 | 1165 | 80 | 135 | 1075 | 1040 |
| 33° | AA + 860 | AA + 830 | 1450 | 1410 | 1125 | 1155 | 80 | 140 | 1085 | 1045 |
| 34° | AA + 865 | AA + 830 | 1450 | 1405 | 1110 | 1145 | 80 | 140 | 1090 | 1050 |
| 35° | AA + 870 | AA + 830 | 1450 | 1395 | 1100 | 1130 | 85 | 145 | 1100 | 1060 |
| 36° | AA + 875 | AA + 835 | 1450 | 1385 | 1090 | 1120 | 85 | 150 | 1110 | 1065 |
| 37° | AA + 880 | AA + 835 | 1450 | 1380 | 1080 | 1110 | 85 | 155 | 1120 | 1070 |
| 38° | AA + 885 | AA + 835 | 1450 | 1375 | 1070 | 1095 | 90 | 155 | 1130 | 1075 |
| 39° | AA + 890 | AA + 835 | 1450 | 1365 | 1055 | 1085 | 90 | 160 | 1140 | 1085 |
| 40° | AA + 895 | AA + 840 | 1660 | 1360 | 1045 | 1075 | 95 | 165 | 1150 | 1090 |
| 41° | AA + 900 | AA + 840 | 1660 | 1355 | 1035 | 1065 | 95 | 170 | 1160 | 1095 |
| 42° | AA + 905 | AA + 845 | 1660 | 1350 | 1025 | 1055 | 100 | 175 | 1170 | 1100 |
| 43° | AA + 910 | AA + 850 | 1660 | 1345 | 1015 | 1045 | 100 | 175 | 1180 | 1110 |
| 44° | AA + 915 | AA + 855 | 1660 | 1335 | 1005 | 1035 | 105 | 175 | 1190 | 1120 |
| 45° | AA + 920 | AA + 860 | 1660 | 1330 | 1000 | 1025 | 105 | 175 | 1200 | 1130 |

* Encadrement théorique étant donné l'hauteur de la première marche (H1) = 180mm.